
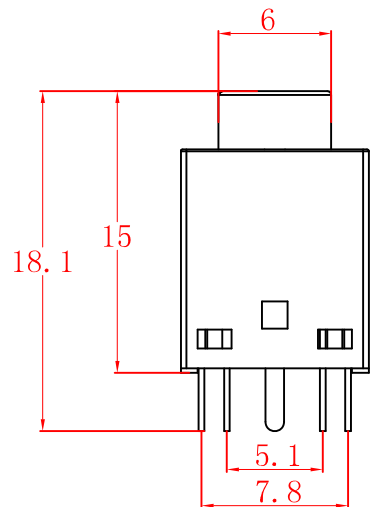



PCB Mounting Hole Dimensions

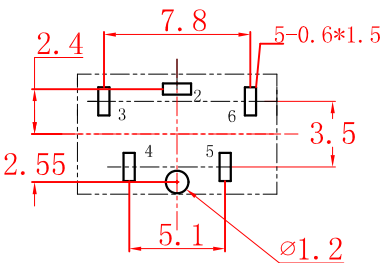

Main Technical Specifications

- 1.Rated electrical load: 30V · 0.5A
- 2.Contact resistance: ≤ 0.03Ω
- 3.Insulation resistance: ≥ 100MΩ
- 4.Dielectric withstand voltage: AC 500V (50Hz) / 1 minute
- 5.Insertion/withdrawal force: 3~20N
- 6.Durability: 5,000 cycles

Circuit Schematic Diagram

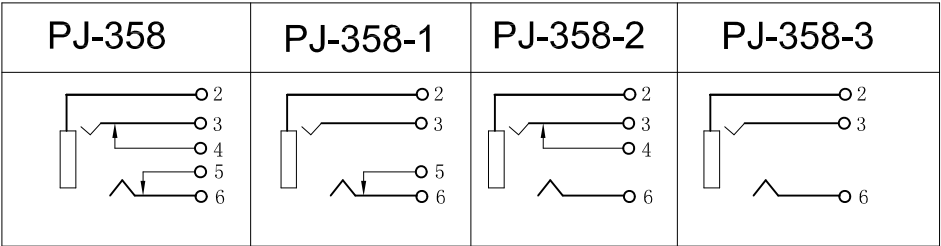

6	Base	PBT	1	Black/ Color Options	
5	6#Contact Pin	Phosphor Bronze Strip T=0.25	1	Silver Plating	
4	5#Contact Pin	Brass Strip T=0.30	1	Silver Plating	REVISION
3	4#Contact Pin	Brass Strip T=0.30	1	Silver Plating	DRAWN 15-6/12
2	3#Contact Pin	Phosphor Bronze Strip T=0.25	1	Silver Plating	DES' D 15-6/12
1	2#Contact Pin	Phosphor Bronze Strip T=0.30	1	Silver Plating	CHK' D 15-6/12
No.	Name	Material	Quantity	Plating / Color	APP' D 15-6/12

GENERAL TOLERANCE		Shenzhen Kinghelm Electronics Co., Ltd.			
		KH-PJ-358		www.kinghelm.net	
		Audio Jack Socket PJ-358 Headphone Connector PJ-358			
ANGLE TOLERANCE		Part Number: KH-PJ-358			
		UNIT	SHEET	SCALE	REV
		mm	1/1	4: 1	A
X. X	±0. 1				
X. XX	±0. 05				
X. XXX	±0. 005				
X. °	±5. 0°				
X. X°	±3. 0°				
X. XX°	±1. 0°				