


3
2
1

ZONE REV. DESCRIPTION APPROVAL DATE


RoHS
Compliant

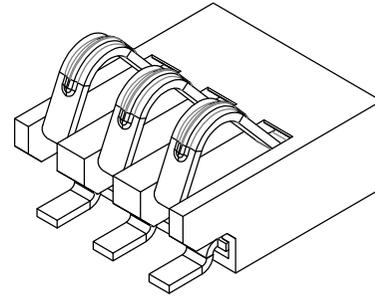


Performance:

Rated current: 1.0A
 Rated voltage: 12V
 Withstand voltage: 500V
 Contact resistance: 30m MAX
 Insulation resistance: 500M
 Operating temperature: -40 ~ +85°C
 Plastic part (Material): LCP E130I
 Contact point (Material): Copper alloy,
 contact gold-plated 3μm





2.54
3.81

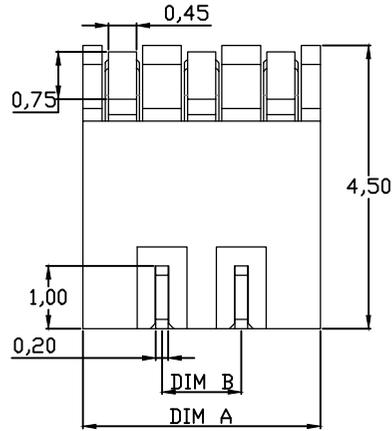

PART NO.	DIM A	DIM B
KH-12701-2P225		
KH-12701-3P225		1.27
KH-12701-4P225	5.08	2.54
KH-12701-5P225	6.35	3.81
KH-12701-6P225	7.62	5.08

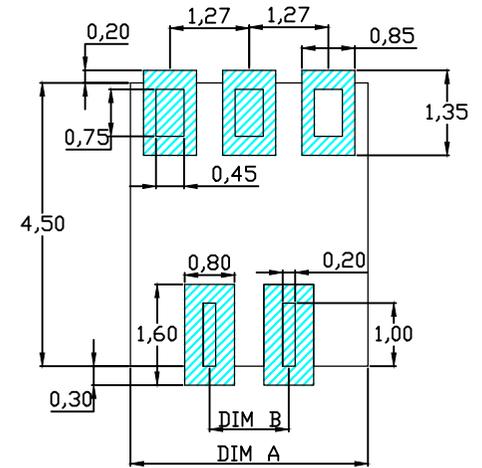

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX ± 0.05)

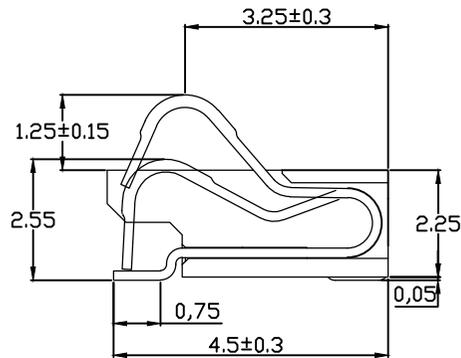

Shenzhen Kinghelm Electronics Co., Ltd
KH-12701-2P225 www.kinghelm.net

DESIGN	X. Z. Huang	SCALE		
DRAWING	X. Z. Huang	UNIT	mm	
CHECK	X. X. Zheng	SIZE	A4:210:297	
APPROVAL	M. Y. Li	VER.	01	
TOLERANCE				
				X. ±0.35
				X. X ±0.25
				X. XX ±0.15
				ANGLE ±3°

PART NAME	Battery Holder
PART NO.	KH-12701 Series
DWG. NO	RBD-SP-0019
DATE	2019-11-04

1

2

3

4

5

6