

REVISIONS

REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

D

D

C


C

B

B

A

A

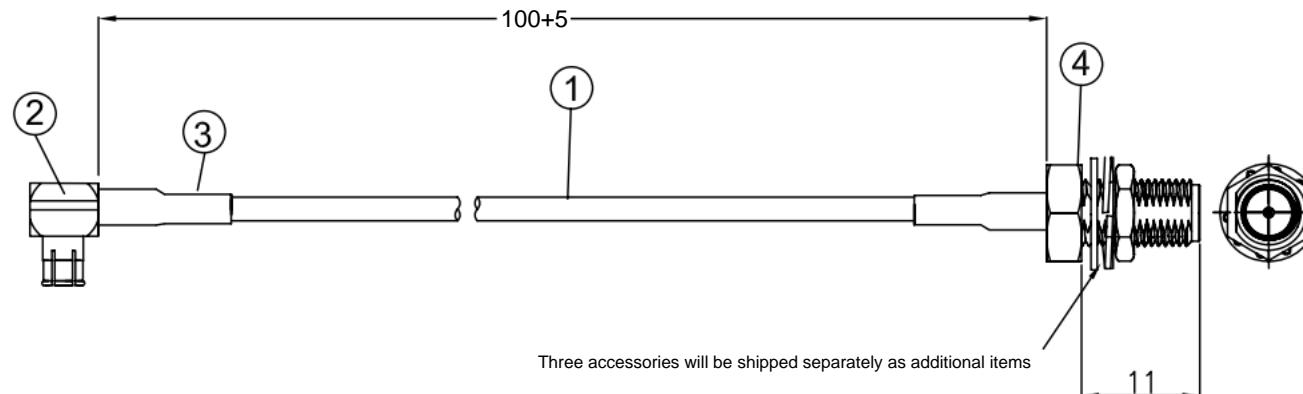

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	Connector	SMA Female Connector with Female Pin, Gold-Plated, for RG-316 Cable	1
③	Sleeve	OD: 2.0mm, Length: 15mm, with thin sleeve	2
②	Connector	Right-Angle MCX Male Connector with Male Pin, Gold-Plated, for RG-316 Cable	1
①	Coaxial Cable	RG-316 Brown Coaxial Cable, OD: 2.5mm	AS

Shenzhen Kinghelm Electronics Co., Ltd.

ALL DIMENSION ARE IN MM	DRI	DATE	KHB(RG316)-MCX-100-28
	DRAIN. Jamy	2019-06-01	TITLE
COMPUTER GENERATED IN SOLIDWORKS	CHIK. Alan	2019-06-01	RF CABLE
DO NOT SCALE THIS DRAWING	APP. Ellis	2019-06-01	SMA /F TO MCX/M L=50mm
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150	REV	
		B	A
	SCALE: Free	TYPE	SHEET 1 OF 1

CUSTOMER P/N: