

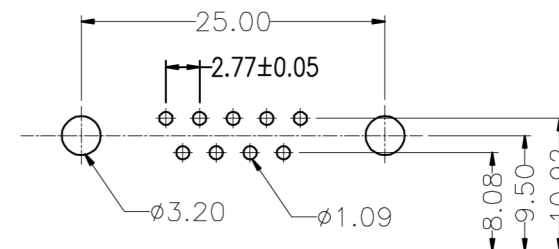
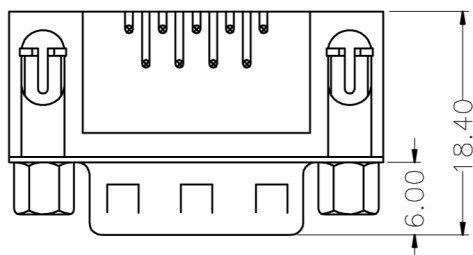


Kinghelm®

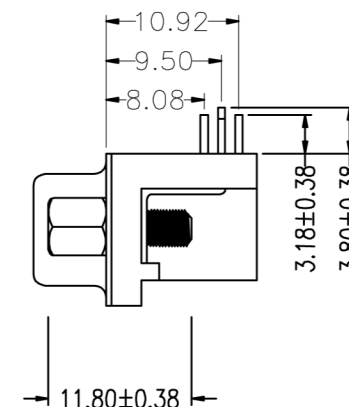

P.C.B. PLYOUT

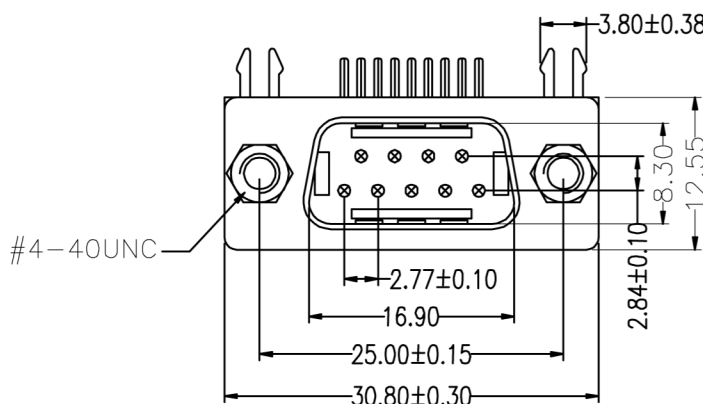

您正在使用
ZwCAD 2007 试用版
详情请查阅WWW.ZWCAD.COM

一、MATERIAL:

- 1.Insulator:PBT+30%Glass Fiber (UL94V-0)
- 2.Contact:Brass
- 3.Contact Plated:Gold Flash over Tin Or Glod Plated Or Tin Plated
- 4.Shell:Steel,Nickel Plated

二、SPECIFICATION:

- 1.Current Rating:5 AMPS
- 2.Insulation Resistance: 5000M Ω MIN. At 500VDC
- 3.Dielectric Strength: 500V for One minute
- 4.Operation Temperature: -55° C~+105° C.

电话(tel)		公 差		深圳市金航标电子有限公司	www.kinghelm.com.cn
传真(fax)		.0±0.25 .00±0.20 .000±0.05	.0'±1.0' .00'±0.5' .000'±0.1'	KH-DR9P-GS8.1	0755-28190160
比例(scale)	1 : 1	日期 (date)		单位(units)	mm
页次(sheet)	A / 1	绘图 (draw)		颜色(shaded)	
版次(rev.)	A / 0	审核 (ch' k)		材料(mt' l)	
视图(view)		核准(app' d)	Ken	处理(finish)	
				图 名(name)	DR-9P铆锁
				图号(draw number)	
				料号 (Part number)	
				图档 (File Name)	