
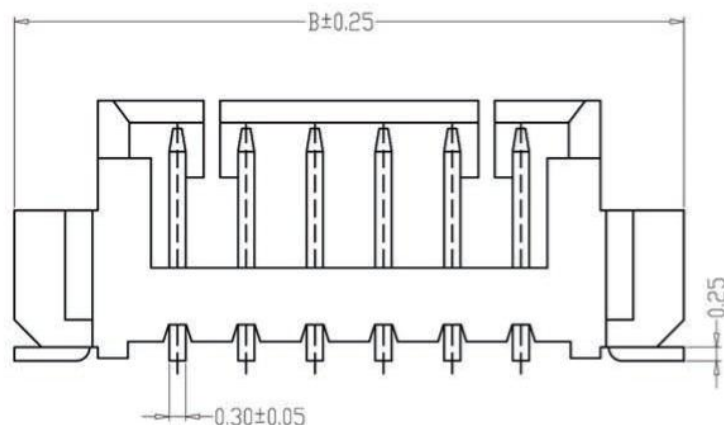
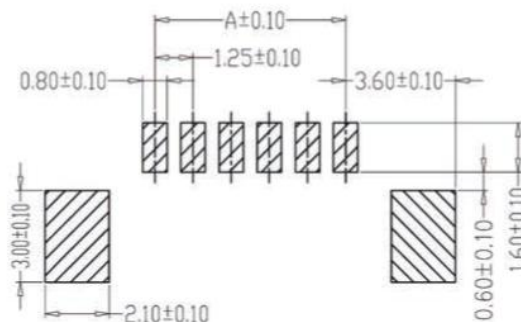


SPECIFICATIONS

1. Current Rating: 1A AC, DC
2. Voltage Rating: 125V AC, DC
3. Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
4. Contact Resistance: $20\text{m}\Omega$ Max
5. Insulation Resistance: $100\text{M}\Omega$ Min
6. Withstanding Voltage: 500V AC/minute
7. Material: Wafer LCP, UL94V-0
PIN Brass Tin-plated
Solder pad Brass Tin-plated

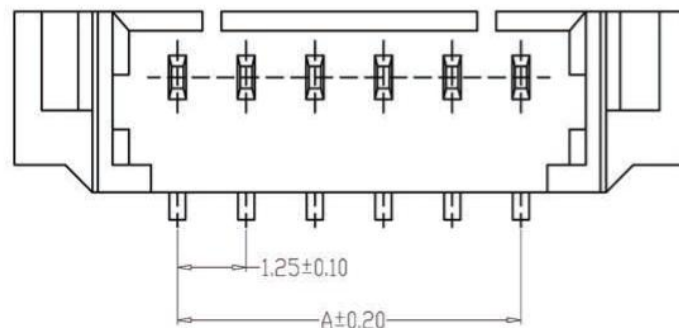

PCB LAYOUT

NO.	mm	
	A	B
A1251LF-02A	1.25	7.35
A1251LF-03A	2.50	8.60
A1251LF-04A	3.75	9.85
A1251LF-05A	5.00	11.10
A1251LF-06A	6.25	12.35
A1251LF-07A	7.50	13.60
A1251LF-08A	8.75	14.85
A1251LF-09A	10.00	16.10
A1251LF-10A	11.25	17.35
A1251LF-11A	12.50	18.60
A1251LF-12A	13.75	19.85
A1251LF-20A	23.75	29.85

DRAWN	DESCRIPTION	DATE	GENERAL TOLERANCE		DRAWING	HE JUNJU		PART NO.	KH-A1251LF-(02-20)A		REV.	A
			X. ± 0.25	X. $^{\circ} \pm 2^{\circ}$		2013、07、01						
					CHECK	LAI JIREN		TITLE	1.25 DIP		SHEET	1/1
			.X ± 0.20	.X $^{\circ} \pm 1^{\circ}$	2013、07、03		WAVE SMT TYPE					
					APPROVAL	ZHANG SONGQIANG		CUTM. NO.				
			.XX ± 0.15	.XX $^{\circ} \pm 0.5^{\circ}$	2013、07、05							
					UNITS	MM	SCALE	1:1	Shenzhen Kinghelm Electronics Co., Ltd.		www.kinghelm.net	
			.XXX ± 0.10	.XXX $^{\circ} \pm 0.5^{\circ}$					KH-A1251LF-05A			