


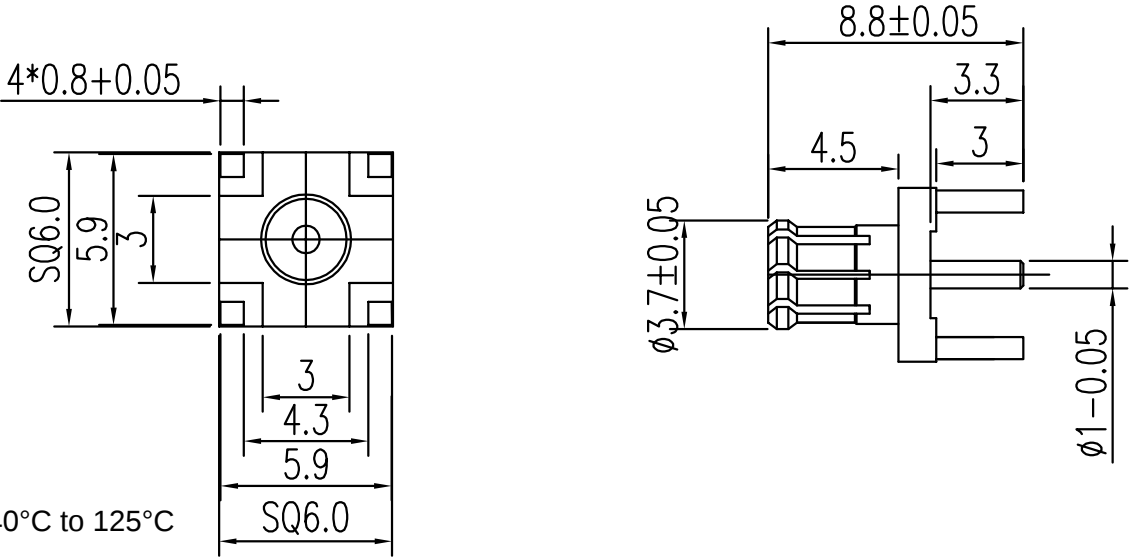

Technical Requirements

- 1. Operating Temperature Range: -40°C to 125°C
- 2. Characteristic Impedance: 50Ω
- 3. Frequency Range: 0-6GHZ
- 4. Dielectric Withstanding Voltage: 750 V
- 5. Insulation Resistance: 1000 MΩ
- 6. Contact Resistance: 5 mΩ (inner conductor), 2.5 mΩ (outer conductor)
- 7. Voltage Standing Wave Ratio (VSWR): ≤ 1.3 (0-6GHZ)
- 8. Durability: 500 mating cycles
- 9. All dimensions are in millimeters (mm)

					名称	GA Drawing	www.kinghelm.net		
							KH-MCX-JE		
更改标记	数量	更改单号	签 名	日 期			Page	SizeScale	Revision
设 计					镀涂材料	Cu/Ep.Cu3Ni4	M4	4:1	V1.0
制 图		2018-12-30							
审 核									
工 艺					料	Hpb59-1	First Page		
批 准							Total: 1 Page		