

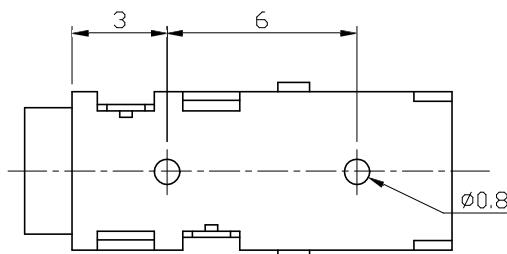
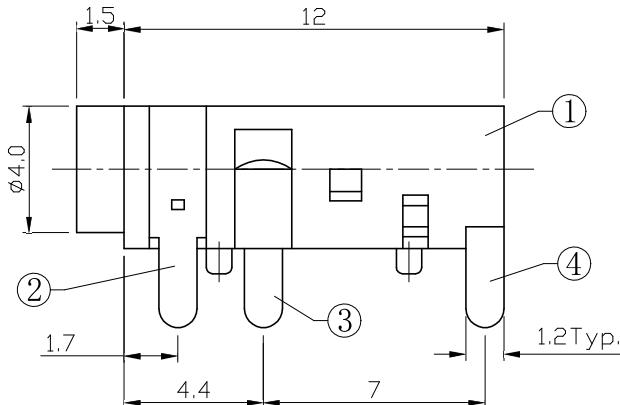


SCHEMATIC

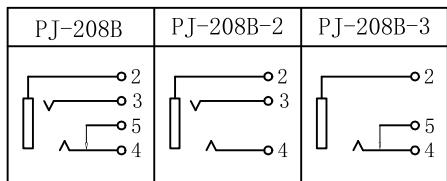

P.C.B LAYOUT
TOP VIEW

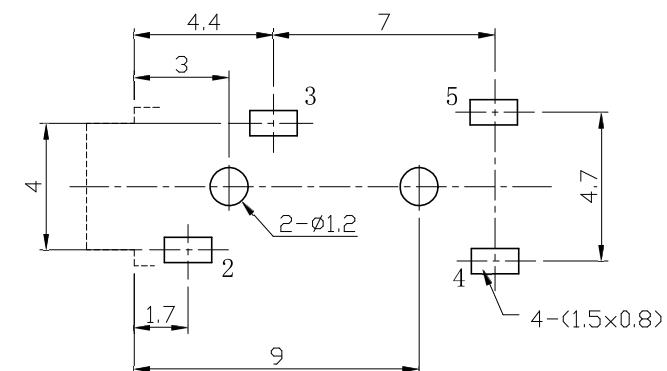

Specification

- Rating:** DC 30V 0.5A
- Contact Resistance:** ≤ 0.03
- Insulation Resistance:** 100M (DC 250V)
- Withstand Voltage:** 500VAC
- Insertion and Extraction Force:** 3-20N
- Life Test:** 5,000 cycles

No.	Name	Material	Quantity	Coating/Color	APP' D 15-6/12
	Static Contact	Brass Strip, T=0.30		Silver Plated	
	Moving Contact	Phosphor Bronze Strip, T=0.30		Silver Plated	REVISION
	Contact	Phosphor Bronze Strip, T=0.25		Silver Plated	DRAWN D 15-6/12
	Contact	Phosphor Bronze Strip, T=0.25		Silver Plated	DES' D 15-6/12
	Base	PA66		Black	CHK' D 15-6/12

X. X	GENERAL TOLERANCE	Shenzhen Kinghelm Electronics Co., Ltd.	
	± 0.1	www.kinghelm.net	
X. XX	± 0.05	Headphone Jack PJ-208B Pins	
X. XXX	± 0.005	KH-PJ-208B	
ANGLE TOLERANCE			
X. °	$\pm 5.0^\circ$		
X. X°	$\pm 3.0^\circ$		
X. XX°	$\pm 1.0^\circ$		
UNIT	SHEET	SCALE	REV
mm	1/1	4: 1	