

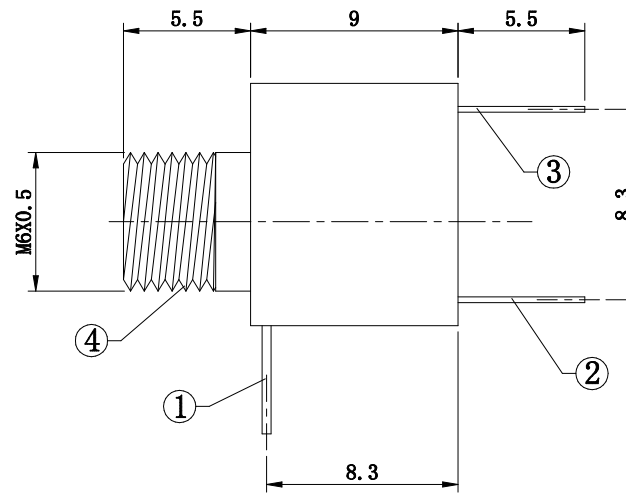


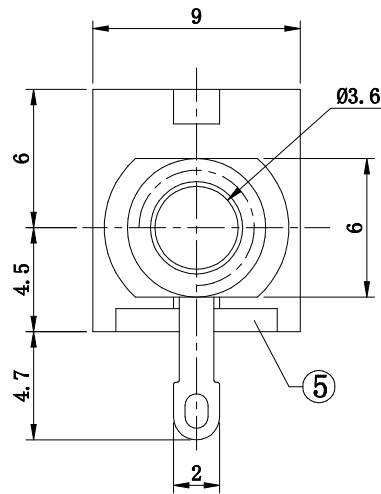

SCHEMATIC



Specification

- 1. Rating: DC 30V 0.5A
- 2. Contact Resistance: $\leq 0.03\Omega$
- 3. Insulation Resistance: $\geq 100M\Omega$ (DC 250V)
- 4. Withstand Voltage: 500VAC
- 5. Insertion and Extraction Force: 3-20N
- 6. Life Test: 5,000 cycles

						GENERAL TOLERANCE		Shenzhen Kinghelm Electronics Co., Ltd.			
						X. X	± 0.1	www.kinghelm.net			
						X. XX	± 0.05	Headphone Jack PJ-301M			
						X. XXX	± 0.005				
						ANGLE TOLERANCE		KH-PJ-301M			
						X. °	$\pm 5.0^\circ$				
						X. X°	$\pm 3.0^\circ$	UNIT	SHEET	SCALE	REV
						X. XX°	$\pm 1.0^\circ$	mm	1/1	4:1	A
5	HOUSING	ABS	1								
4	AXIS SUPPORT	H62 BRASS	1	Ni-Plating	REVISION						
3	SPRING PIECE	PHOSPHOR BRONZE	1	Cu-Sn-Plating	DRAWN 15-6/12						
2	CURVE PIECE	H62 BRASS	1	Su-Sb-Plating	DES' D 15-6/12						
1	FLAT PIECE	H62 BRASS	1	Cu-Sn-Plating	CHK' D 15-6/12						
No.	Name	Material	Quantity	Coating/Color	APP' D 15-6/12						